

Drink. Water Eng. Sci. Discuss., 2, 279–294, 2009
www.drink-water-eng-sci-discuss.net/2/279/2009/
© Author(s) 2009. This work is distributed under
the Creative Commons Attribution 3.0 License.

This discussion paper is/has been under review for the journal Drinking Water Engineering and Science (DWES). Please refer to the corresponding final paper in DWES if available.

Online modelling of water distribution systems: a UK case study

J. Machell, S. R. Mounce, and J. B. Boxall

Pennine Water Group, Department of Civil and Structural Engineering, University of Sheffield, Sheffield, UK

Received: 11 December 2009 – Accepted: 15 December 2009
– Published: 23 December 2009

Correspondence to: S. R. Mounce (s.r.mounce@sheffield.ac.uk)

Published by Copernicus Publications on behalf of the Delft University of Technology.

**Online modelling of
water distribution
systems**

J. Machell et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Abstract

Hydraulic simulation models of water distribution networks are routinely used for operational investigations and network design purposes. However, their full potential is often never realised because, in the majority of cases, they have been calibrated with data collected manually from the field during a single historic time period and, as such, reflect the network operational conditions that were prevalent at that time, and they are then applied as part of a reactive, desktop investigation. In order to use a hydraulic model to assist proactive distribution network management its element asset information must be up to date and it should be able to access current network information to drive simulations. Historically this advance has been restricted by the high cost of collecting and transferring the necessary field measurements. However, recent innovation and cost reductions associated with data transfer is resulting in collection of data from increasing numbers of sensors in water supply systems, and automatic transfer of the data to point of use. This means engineers potentially have access to a constant stream of current network data that enables a new era of “online” modelling that can be used to continually assess standards of service compliance for pressure and reduce the impact of network events, such as mains bursts, on customers. A case study is presented here that shows how an online modelling system can give timely warning of changes from normal network operation, providing capacity to minimise customer impact.

1 Introduction

The day to day operation of a water supply system is managed by skilled staff that use their experience and expert judgement to adjust control elements such as pumps and valves to ensure customer demands on the systems are met (regulatory compliance), and to minimise energy costs. As water use tends to follow repeatable patterns the operators understand what is required for normal operation but, when an unplanned

DWESD

2, 279–294, 2009

Online modelling of water distribution systems

J. Machell et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



event such as a burst main occurs, they often have to respond in a reactive manner, usually with scant information provided by contact from customers already impacted by the event. Because water companies are constantly striving to improve standards of service delivery and increased customer satisfaction, there is a need to shift from this reactive approach to a more proactive management strategy. One of the tools that can be used to help accomplish this shift is an online hydraulic network simulation model.

Network simulation software provides the capability to mathematically replicate the nonlinear dynamics of a water distribution network by solving the governing set of quasi-steady state hydraulic equations that include conservation of mass and conservation of energy elements. Hydraulic simulation software is in widespread use within the water industry for strategic supply analysis, design of control strategies, network extensions, and maintenance planning. A number of off the shelf packages are available that allow tailor made simulation models to be constructed for a water companies specific requirement. Popular packages include EPANET (US Environmental Protection Agency), AQUIS (7T), Infoworks (Wallingford software), and SynerGEE (Advantica). These simulation software packages enable the implementation of mathematical models of a water distribution networks that combine the physical laws governing the networks with the equations that relate pressure and flow for each operational element.

The design of distribution networks using these software packages has developed from trial and error to, more recently, the use of various forms of optimization, including genetic algorithms (e.g. Dandy et al., 1996). Tools of this type are offline in nature as, although very efficient, the computational burden is often large. Real time, near optimal control using hydraulic modelling is still somewhat impractical for large water distribution networks because of the computational burden such optimization imposes, and alternative approaches are being developed. Bhattacharya et al. (2003) proposed an ANN (Artificial Neural network) with reinforcement learning which could learn to replicate the optimal control strategy (based on capturing operator experience). Rao and Salomons (2007) developed a GA (Genetic Algorithm) and an ANN model for capturing the knowledge base of an EPANET model and consequently producing a

Online modelling of water distribution systems

J. Machell et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



near optimal solution for control settings under dynamic conditions (with 1 h SCADA updates).

For any hydraulic model to be useful to operators it should contain accurate element physical characteristic information and be calibrated, by adjusting the model variable parameters until field measurement and model simulation results are in reasonable agreement, so that it accurately reflects the true operational characteristics of the network. This process generally requires a considerable amount of data, for example, around 14 days of measured flow and pressure from the network, which has traditionally been collected manually, and manipulation of model variables. Kapelan et al. (2000) reviews calibration models. Koppel and Vassiljev (2008) illustrate the calibration problem with a case study.

Some preliminary efforts have been made to link hydraulic simulation models with online data from telemetry systems for operational purposes (Skipworth et al., 1999; Orr et al., 1999). The idea was to associate a well calibrated network hydraulic model with a SCADA (Supervisory Control and Data Acquisition) system that populated a database with near real time measurements of flow and pressure from strategic points in the network that could be accessed by a simulation model. However, data was transmitted via telephone lines and wired modems which frequently could not connect to some of the data loggers in the network. The system was slow and suffered data corruption problems. Also, because every data logger had to be contacted individually via a telephone call to obtain a single, current reading, the time required to gather data from all the loggers was significant thereby introducing data “skew” that could affect simulation results.

This paper describes an online hydraulic simulation model and demonstrates its potential by showing details of a flow event detected in one case study network DMA (Distribution Management Areas). It is shown that a sufficiently accurate online model may be used to detect hydraulic events such as bursts and if correctly configured, such a model can also detect illegal hydrant or valve operations, and monitor standards of service levels for pressure.

Online modelling of water distribution systems

J. Machell et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



2 Conventional modelling of distribution networks

A conventional distribution network simulation model is comprised of static asset information including pipe lengths, diameters, connectivity, and network topography; and information about dynamic parameters, for example, the distribution of demand, and elements such as pumps, reservoirs and valves. Most contemporary modelling packages in current use utilise models that include every main down to the level of, but not including, customer service pipes. Standard daily time-varying demand relationships are estimated for different customer types, and these are summed and allocated at pipe junctions (nodes) according to the distribution of customers. The models are normally used to simulate flows and pressures over a fixed (normalised data from a specific date) 24 h period which provides enough information to be suitable for purpose. Since their advent, these complex calibrated models have predominantly been used for leakage management and control, specifically for splitting distribution networks into discrete DMAs, the design of pressure reduction schemes, and the location of substantial leaks during model calibration exercises.

3 Online modelling of distribution networks

An online simulation model requires the same information as a conventional model, but uses current, near real time data for boundary conditions; the simulation initial parameter values at key locations. Rather than simulate a fixed 24 h period as conventional models, an online models is most useful to the operator if it provides the latest period of operation and ideally a look ahead for likely performance in the next few hours, based on extrapolation of current performance with respect to the original offline model. An online model can calculate the current network status and status for the next few time steps based on current measurements and the inbuilt predicted demand patterns. Complex models can have hundreds of measurements imposed as simulation boundary conditions at the inlets and outlets of DMAs, service reservoirs

DWESD

2, 279–294, 2009

Online modelling of water distribution systems

J. Machell et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



and pumping stations, in fact, anywhere that flow or pressure is measured in the real network. In order to simulate the current hydraulic state of a network, demand constraints within the model are relaxed and their adjustment allows for a solution to be calculated that matches the measured hydraulic conditions.

4 The online model

This paper presents an online model using the Aquis 1.47 (7T) software. The model is driven by near real-time flow and pressure data gathered using GPRS communication technologies that downloaded data with a 15 min sample interval every 30 min. This GPRS technology includes accurate time stamping, irrespective of any intermittent communication errors, that ensures no data skewing occurs across measurement sites. The full area covered by the online hydraulic model includes a large area of a town of 160 000 people (approximately 25 500 properties) and is supplied with 77 near real time measurements. It comprises 16 DMAs, 4 service reservoirs, 2 pumping stations, 9081 pipes and 8571 nodes. Figure 1 shows the geographical extent of the model.

4.1 Model construction and calibration

A conventional network simulation model calculates a hydraulic solution under a set of constraints which correspond to an estimated distribution of demand for an idealized 24 h period. During calibration, even low accuracy data will produce an apparently sensible, if not wholly accurate solution. For an online simulation, with numerous hydraulic flow and pressure boundary conditions imposed, these constraints are relaxed, leading to the requirement for a higher degree of accuracy both in the model calibration procedure and the online flow and pressure measurements. Hence, the first requirement for an online model is for an accurate representation of the network and a well calibrated conventional hydraulic model. For the work reported here the calibrated conventional

Online modelling of water distribution systems

J. Machell et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



offline model was built by consultants on behalf of the water company. Once a suitable conventional hydraulic model has been produced, it is necessary to connect it for on-line operation. This is achieved by a SCADA system to provide the flow and pressure data for simulation boundary conditions, and a data management system that checks data status and pre-processes it in preparation for use in the model.

4.2 Data route and interfacing

Field data from the logger and GPRS system was automatically forwarded via FTP to a server at the University and a windows service automatically copied the files to a file store. DataManager, an online database application for configuring, pre-processing and administering the raw data for use with AQUIS, accessed the stored files and transferred them into an integral MS Access database where all flow and pressure time series used by the online model are stored. The online model was linked to the database and a data pre-processor then checked the raw data against defined parameters for missing or corrupt data. Where data was missing or corrupt, a data emulation module replaced it with last, default, or average value as instructed by operator defined rules. On completion of the pre-processing, the data was imposed as boundary conditions for simulations at the appropriate nodes/pipes within the model.

4.3 Example event

As stated above an online model has been successfully created for a significant network area. In order to tangibly demonstrate the capabilities of the online model attention is focused on a single DMA where an unusual event is known to have occurred.

The DMA used for the selected example is a semi rural DMA with customers concentrated at the north end. For the purposes of the results reported here, a single DMA model was extracted from the full online model with real time data for the DMA inlet and export flows streamed into the model and imposed as simulation boundary conditions using DataManager. The model was then checked to confirm that under “normal”

Online modelling of water distribution systems

J. Machell et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)



[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



conditions the online simulation results were comparable to those produced by the conventional hydraulic model, at the time of calibration. This confirmed that under normal operational flow conditions the online model produced output that accurately reflected the actual pressure conditions found in the real network. Figure 2 shows a network plot with pressure overlay, and the locations of the imposed flows under normal operational conditions.

During a period of operations a fire hydrant was opened producing a flow to waste of approximately 3 l/s, this was confirmed by an Artificial Intelligence based alert system running concurrently (Mounce and Boxall, 2010). Figure 3 shows the flow and pressure changes that occurred during the event and some details of the timings.

Figure 3 shows that increased flow and decreased pressure was measured by the instruments associated with the selected DMA, this is interpreted to infer that a hydrant was opened at 21:30 26/6/08. The hydrant opening was detected at 9 a.m. by the AI system the following morning and estimated the event flow to be 2.8 l/s (the AI system operates on a twelve hour window). The alert was noted in the water company control room and a field operative sent to investigate. The hydrant was subsequently found, in the DMA downstream of the one presented here, and closed at 15:00 h.

Following the identification and characterization of the event the online hydraulic model was used in historic mode to test its capability to detect the event by “replaying” the time series data gathered at the time to predict the flow and pressure changes throughout the selected DMA. The online model effectively simulated the flow increases into and out of the DMA from 06:00 and simulated the pressure effect of the event within the DMA. Figures 4 to 6 show the effects of the event propagating through the DMA as simulated by the model.

This sequence of figures illustrates that the online model can show the effects of the event on the pressures throughout the network. Each figure is a picture of current network status generated using SCADA data specific to the times shown on the slides i.e. Fig. 7 is generated by the model using SCADA data measured at 11:00 imposed as simulation boundary conditions. With the SCADA and modelling system current

Online modelling of water distribution systems

J. Machell et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



configuration, the operator would have seen these screen views (operator screens) about an hour after the event. It is perfectly feasible however to gather and transfer data, and carry out the simulation, inside a 15 min window. As the effects last several hours this would allow sufficient time to warn customers or, if possible, make network changes to limit or even protect customers from the effects.

5 Conclusions

Online simulation models require a continuous feed of flow and pressure data from the real network being simulated. Advances in communications technologies have made it viable to transfer such data directly from network instrumentation to the point of use at a frequency suitable to be of practical use. Simulation results presented here have demonstrated that such an online model can provide early warning of the magnitude of effect in each pipe in a network and hence on customer service. This capability enables models to simulate and report current network hydraulic state which can be monitored to detect network events such as burst mains and respond to events in a proactive and timely manner.

Online simulation of a water distribution network provides a tool that can offer significant operational benefit. It allows network operators to progress beyond the reactive and develop a more proactive approach to network management. The early effects of a network event such as a burst main can be detected at an early stage which, in turn, can allow network operators to minimize the later effects and sometimes pre-empt and avoid many standards of service failures by manipulating valves, providing an alternative supply or making other appropriate operational change. Pressure effects on every pipe in a network can be captured to gather knowledge about which customers were affected by an event and for how long.

Online modelling of water distribution systems

J. Machell et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Acknowledgements. This work is part of the NEPTUNE project supported by the UK Science and Engineering Research Council, grant EP/E003192/1, and Industrial Collaborators. The authors would like to particularly acknowledge the assistance of Ridwan Patel from Yorkshire Water Services.

5 References

- Bhattacharya, B., Lobbrecht, A. H., and Solomatine, D. P.: Neural networks and reinforcement learning in control of water systems, *J. Water Res. Pl.-ASCE*, 129(6), 458–465, 2003.
- Dandy, G. A., Simpson, A. R., and Murphy, L. J.: An improved genetic algorithm for pipe network optimisation, *Water Res.*, 32(2), 449–458, 1996.
- 10 Kapelan, Z., Savic, D. A., and Walters, G. A.: Inverse transient analysis in pipe networks for leakage detection and roughness calibration, *Proceedings of Water Network Modelling for Optimal Design and Management*, Exeter, UK, 143–159, 2000.
- Koppel, T. and Vassiljev, A.: Calibration of the Model of an Operational Water Distribution System, *Proceedings of the IWA World Water Congress (WWC)*, Vienna, 2008.
- 15 Mounce, S. R. and Boxall, J. B.: Implementation of an on-line Artificial Intelligence District Meter Area flow meter data analysis system for abnormality detection: a case study, *Water Sci. Technol.*, in press, 2010.
- Orr, C., Bououlos, P., Stern, C., and Liu, P.: Developing real-time models of water distribution systems, *Modeling and optimisation applications*, *Water engineering and management series*, 3–4, edited by: Savic, D. and Walters, G., Vol. 1, *Research Studies Pr.*, 1999.
- 20 Rao, Z. and Salomons, E.: Development of a real-time, near-optimal control process for water distribution networks, *J. HydrolInform.*, IWA Publishing, 9(1), 25–37, 2007.
- Skipworth, P. J., Saul, A., and Machell, J.: Practical applications of real time hydraulic modelling of water distribution networks, *Int. J. COMADEM*, 2, 1, 15–21, 1999.

Online modelling of water distribution systems

J. Machell et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)



[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Online modelling of water distribution systems

J. Machell et al.

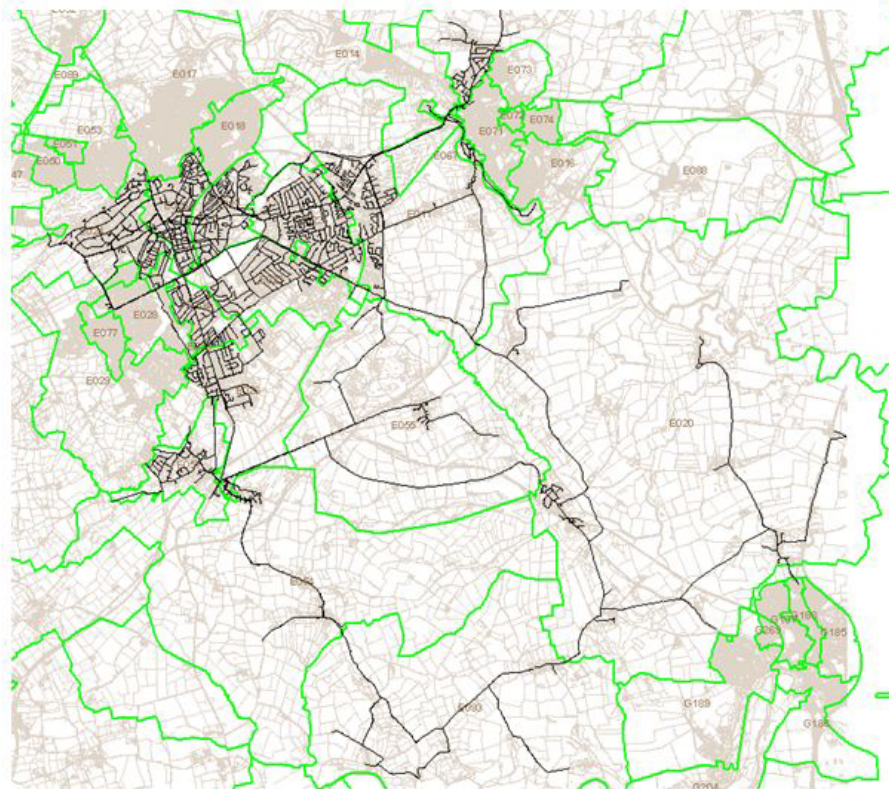


Fig. 1. Online model geographical extent showing all pips, background map and DMA boundaries.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Online modelling of water distribution systems

J. Machell et al.

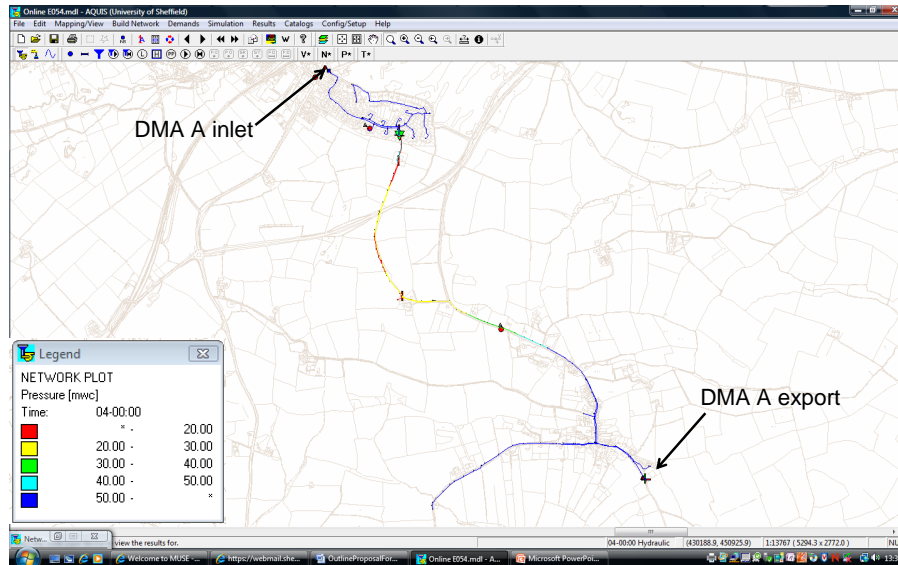


Fig. 2. Example DMA network plot with normal pressure overlay.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[⏴](#)

[⏵](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Online modelling of water distribution systems

J. Machell et al.

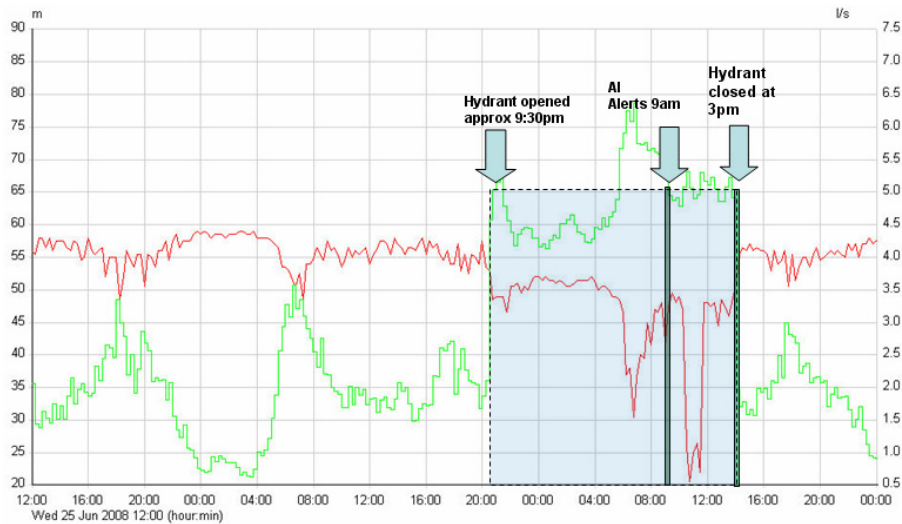


Fig. 3. Details of event as reported by Artificial Intelligence based alert system.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Online modelling of water distribution systems

J. Machell et al.

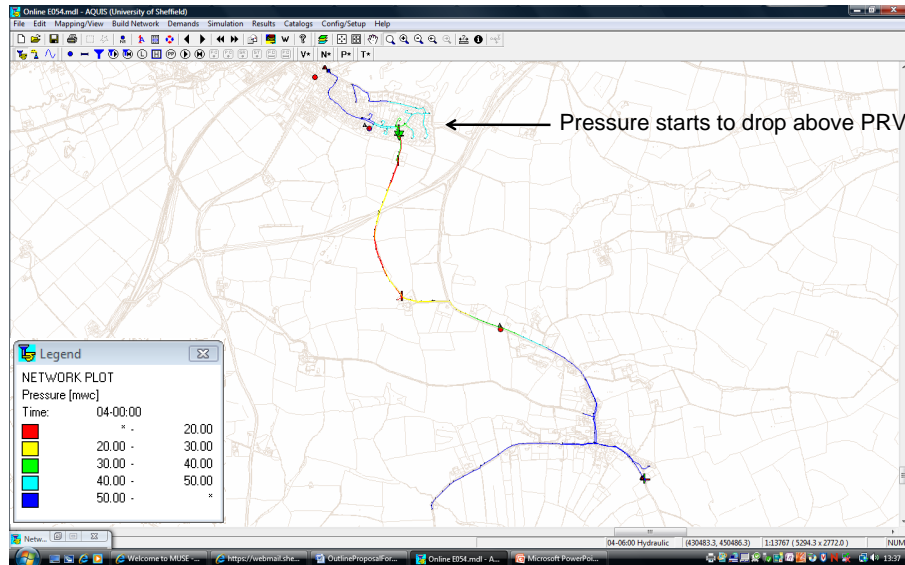


Fig. 4. Pressure effect of event at 06:00.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

◀ ▶

◀ ▶

Back Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Online modelling of water distribution systems

J. Machell et al.

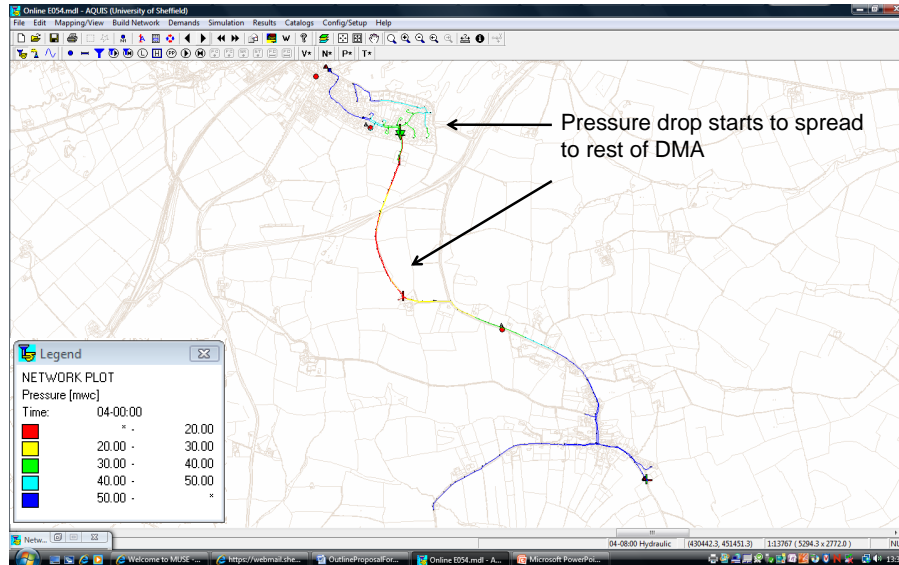


Fig. 5. Pressure effect of event at 08:00.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



Online modelling of water distribution systems

J. Machell et al.

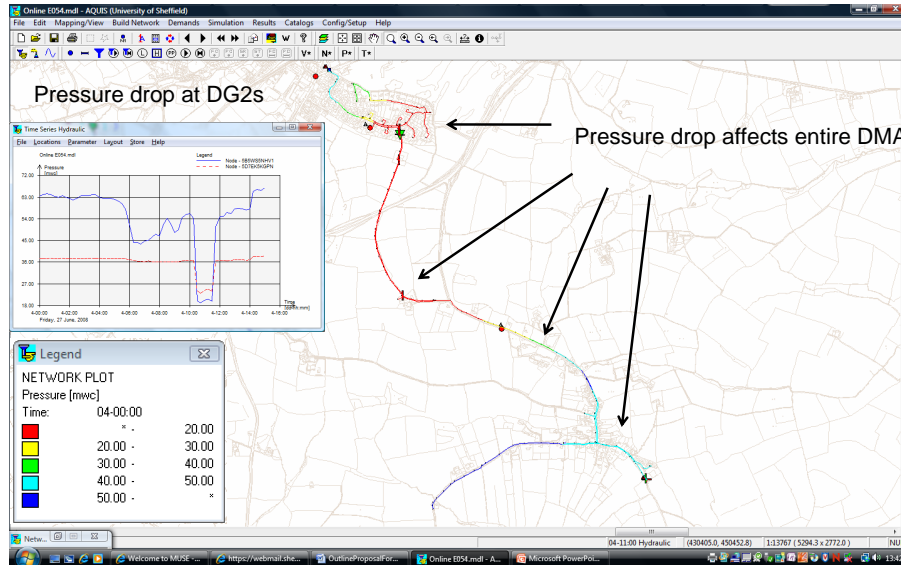


Fig. 6. Pressure effect of event at 11:00.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

