



1 **Effect of water depth, Inlet water temperature, and fins**  
2 **on the productivity of a pyramid solar still – An**  
3 **experimental study**

4

5 Malik Yousef Al-Abed Allah\*<sup>†</sup>, Mohammad Omar Abu Abbas  
6 Department of Mechanical Engineering, Jordan University of Science and Technology,  
7 Irbid, Jordan

8

9 \*Correspondence: [myalabedallah16@eng.just.edu.jo](mailto:myalabedallah16@eng.just.edu.jo)

10

11

12 **Malik Yousef Al-Abed Allah**, Department of Mechanical Engineering, Jordan University  
13 of Science and Technology, 22110, Irbid, Jordan, [myalabedallah16@eng.just.edu.jo](mailto:myalabedallah16@eng.just.edu.jo)

14

15 **Mohammad Omar Abu Abbas**, Department of Mechanical Engineering, Jordan  
16 University of Science and Technology, 22110, Irbid, Jordan,  
17 [moabuabbas16@eng.just.edu.jo](mailto:moabuabbas16@eng.just.edu.jo)

18

19

20

21

22

23

24

25

26

27

28




29 **Key words:** solar still, water depth, Inlet water temperature, fins, Pyramid,  
30 productivity, desalination, freshwater.

### 31 **Abstract**

32 Many approaches are using to improve the productivity of the pyramid solar still. Pyramid  
33 solar still provides a larger surface area than conventional types of solar still. In this  
34 research work, three sections have been evaluated. The first section has been studied by  
35 changing the water depth from 1 to 5 cm. In the second part of the experiment, increasing  
36 the inlet water temperature has been investigated, and finally, adding fins at the bottom of  
37 the still at certain inlet water depth has been achieved. The experimental results show that  
38 the still productivity could be influenced by the basin depth by up to 40.6% when varying  
39 water depth from 1 to 5 cm, The freshwater production from the pyramid solar still was  
40 1230.5, 1045, 998, 901, and 731 ml for the water depth from 1 to 5 cm, respectively.  
41 Moreover, it was found that productivity increased by 7.5% when fins were used at the  
42 bottom of the pyramid solar still. In addition, the results showed that the still productivity  
43 could be influenced by varying inlet water temperature to 15.3% and 21.2% when varying  
44 the inlet water temperature from 30 C° to 40 C° and 50 C°, respectively.

### 45 **Graphical Abstract**

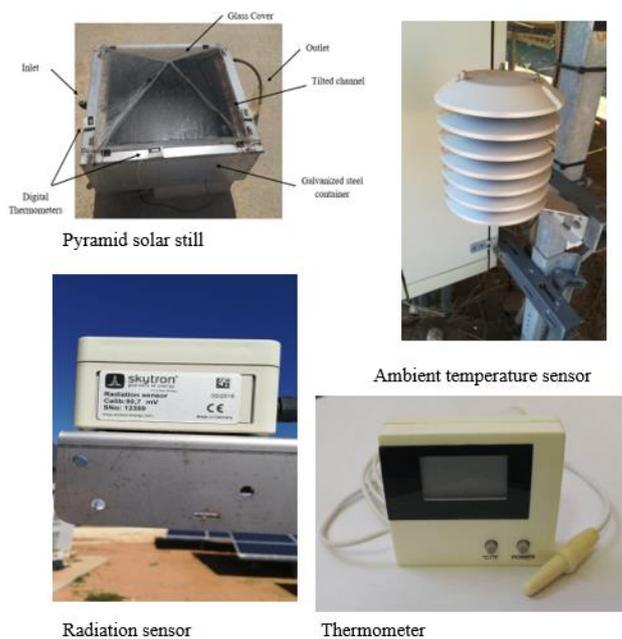

**Experimental Setup Devices**



## 60 **1- Introduction**

61 Freshwater one of the most essential elements in the world and it's important to life.  
62 Production of fresh water is still a major problem in several world regions, especially in  
63 remote areas. In unsophisticated and sophisticated regions, millions of people capture water  
64 from unclear resources approximately, 70% of the world area is covered by water, from  
65 this percentage 97% is salty and unclear water founded in the sea and ocean. The  
66 percentage of fresh water available is about 3% of the total water on the world.  
67 Unfortunately, the distribution of freshwater reservoirs, worldwide, is irregular.

68  
69 Desert regions (Jordan and all of Middle East regions) complain from difficult freshwater  
70 stress which dominated the weaker population. Freshwater reservoirs are limited and  
71 finished, yet the need to drinking water is increasing. Such an issue comes about a huge  
72 danger that will certainly result in worrying humanity, economic break down, and  
73 collapsing of living standards. These problems have drawn our interesting for the need to  
74 research and find other sources of freshwater.

75  
76 Techniques for getting clear water such as: electro dialysis, multi-stage flash desalination,  
77 vapor compression, reverse osmosis, and many others are available. However, these  
78 options are known of their defects in terms of their need to resources of electric power for  
79 producing potable water and cost of installation and operation and maintenance. In  
80 addition, a water pipeline circulation system is not founded in coastal and remote areas, the  
81 ground network and transportation system are inefficient to carry a huge amount of clear  
82 water regularly from desalination plant areas to the consumers regions.

83  
84 Among many, solar desalination of unsalted water is emerging as an inescapable option,  
85 mainly in remote desert areas, because its low cost, maintenance and simplicity. Desert  
86 regions in North Africa and Middle East are famous of their high intensity of solar  
87 irradiation. This makes the direct exploiting of solar radiation for water treatment gives a  
88 promising Techniques for these regions.

89  
90 Solar still is a device that is used to desalinate impure water like saline water and convert  
91 it to fresh water by using the solar energy as fuel. The concept behind the use of solar  
92 energy to convert the saline or brackish water to fresh water is quite simple. Water left in  
93 an open container in an area exposed to the sun will evaporate into the air. The role of the  
94 solar still is to capture this water vapor by condensing it onto a cool surface. For capturing  
95 and condensing the water vapor, a transparent surface such as glass is needed as it allows



- 96 the sunlight to reach the water. Solar stills have got major advantages over other distillation  
97 systems as follows:
- 98 • Produces pure water.
  - 99
  - 100 • No prime movers required.
  - 101
  - 102 • Non-skilled operator required.
  - 103
  - 104 • The possibility of local manufacturing and maintenance.
  - 105
  - 106 • Low investment and can purify highly saline water (even seawater).
  - 107
  - 108

109 Moreover, solar still systems are categorized into two classes: passive and active systems.  
110 These categories are classified based on the source of energy supply. In the passive solar  
111 still systems, the solar energy is the only source of thermal energy. However, the active  
112 solar still systems use an additional thermal energy along with solar energy. This additional  
113 thermal energy might be obtained by using a solar collector (Badran 2005)<sup>1</sup>, or any other  
114 source of waste thermal energy such as that from a power plant (Aybar 2007). Many  
115 researchers were interested in the sea water and brackish water desalination using solar  
116 energy. Till today, many experimental and theoretical studies are undertaken in order to  
117 modify the solar still using different configurations and improve its yield (Rubio-Cerda  
118 2002). The study of many researchers undertaken in this context, indicate that the yield of  
119 the solar still depends on the different external and internal operating parameters and that  
120 the produced water quantity varies according to the type of the solar still.

121

122 Ahmed Al-Garni (2012) made an experiment to examine the effect of adding water heater  
123 device in the basin water of double slope solar still. The results inferred that the  
124 performance of still enhanced by about 370% when adding two water heaters each one has  
125 0.5 kW capacities. A.E. Kabeel et al (2018) conducted a theoretical study to show the effect  
126 of using different type of organic and inorganic PCMs on the performance of solar  
127 desalination. The results showed the higher productivity in organic PCM and inorganic  
128 PCM are A48 and capric-palmitic respectively. Badran et al (2005)<sup>2</sup> tested the effect of  
129 connected conventional flat-water heater collector with solar desalination system using tap  
130 and saline water as a feed. The experimental results founded that the performance of  
131 proposed technique was increased by 231% comparing with conventional still in case of  
132 using tap water and 52% in case of using saline water. Voropoulos et al (2001) designed a  
133 single slope solar still system coupled with storage tank and flat plate collector. The  
134 experimental results founded that integrating solar desalination system with flat plate  
135 collector doubles the productivity value comparing with conventional still. Moreover, the  
136 performance of still enhances in the night due to increase temperature difference between



137 water and glass cover of still. Voropoulos et al (2003) conducted an experiment to  
138 investigate the effect of integrated hot water storage tank with symmetric solar desalination  
139 system using heat exchanger. The results illustrated that the productivity of still increase  
140 in the daylight as water temperature increase and is shifted towards the night. Velmurugan  
141 et al (2008) conducted an attempt to investigate the effect of adding fins with different  
142 types of materials such as black rubber, sand, pebble and sponge between the fins. Their  
143 experimental results showed that the daily efficiency of Fin type still, Fin type still with  
144 black rubber, Fin type still with sand, Fin type still with pebble, Fin type still with sponge  
145 and Fin type still with sand sponge increased 60.2%, 65.1%, 63.4%, 64.1%, 66.4% and  
146 69.1% respectively. Velmurugan et al (2008) studied the effect of integrated fins, wick and  
147 sponge on the performance of solar still. The results indicated that, the productivity of fins  
148 type, wick type and sponge type increased by 45.5%, 29.6% and 15.3% respectively. Jani  
149 et al (2019) conducted an experiment to evaluate the effect of integrated circular and square  
150 cross-sectional hollow fins on the basin liner still at different water depth (10 mm, 20mm  
151 and 30mm). The experimental results showed that the maximum water productivity has  
152 been when using circular and square finned solar still at 10 mm water depth. Agrawal et al  
153 (2017) conducted a theoretical and experimental study to find the performance of solar still  
154 at different basin water depth ranging from 0.02 m to 0.01 m. Their experimental results  
155 indicated that the maximum daily efficiency was about 41.49% and 32.42% in case of  
156 experimental study and 52.83% and 41.75%, in case of theoretical study for 0.02 m and  
157 0.10 m of basin water depth respectively. Salah Abdallah et al (2009) examined effect of  
158 three type of absorbing materials (coated metallic wiry sponges, uncoated metallic wiry  
159 sponges and black rocks respectively) on the productivity of solar still. The results  
160 indicated that the overall average gain of distilled water increased about 28%, 43% and  
161 60% for coated metallic wiry sponges, uncoated metallic wiry sponges and black rocks  
162 respectively comparing with conventional one. Manokar et al (2019) conducted an  
163 experiment to investigate the performance of pyramid solar still at different water depth  
164 with and without insulation material. The experimental results showed that the distilled  
165 water without insulated material was about 3.27, 2.93, 2.26, and 1.59 kg/m<sup>2</sup> and with  
166 insulated material was about 3.72, 3.40, 2.70, and 2.08 kg/m<sup>2</sup> for water depth of 1, 2, 3,  
167 and 3.5 cm, respectively Kabeel et al (2019) tested the effect of tubular solar still (TSS)  
168 using various water depth (0.5, 1, 2 and 3 cm) on the performance of solar still. The test  
169 founded that the productivity of still reach to about 4.5 L/m<sup>2</sup> at 0.5cm water depth, while  
170 at 3 cm the daily productivity gave 3 L/m<sup>2</sup>. Rajamanickam et al (2012) conducted an  
171 experimental setup to investigate the effect of different water depth (0.01m, 0.025m, 0.05m  
172 and 0.075m) on the performance of single basin double slope(DSSS) and single slope solar  
173 still (SSSS) each one has the same area. The results showed that the maximum water output  
174 was 3.07 L/m<sup>2</sup> /day at 0.01m water depth in the DS solar still Phadatara et al (2007) made  
175 an attempt to study the effect of water depth (varied from 0.02 m to 0.12 m) on the  
176 productivity of single slope plastic solar still. The results showed that the maximum water  
177 output was 2.1 L/m<sup>2</sup> /day at 0.02m water depth.

178



179 It was noticed that there are absent experiments that study the effect of changing inlet water  
180 temperature on the productivity of pyramid solar still. Moreover, most of researches  
181 focused on single and double slope solar still to study effect of increasing depth of water  
182 and adding basin liner fins on the performance of pyramid solar still. Hence, this research  
183 came to explain the behavior of pyramid solar still when varying temperatures of inlet  
184 water (30 C°, 40 C° and 50 C°) firstly. Furthermore, it investigates the productivity of still  
185 by increasing water depth from 1 cm to 5 cm in the second part. Finally, it evaluates the  
186 solar still performance by integrated five vertical fins with height, length and thickness 20,  
187 600 and 2.5 mm at specific depth of water, respectively on the basin liner of pyramid solar  
188 still.

189

## 190 **2- Experimental setup and procedure**

191

192 The 3D diagram of the PSS is shown in Figure. The PSS consists of a glass cover, internal  
193 galvanized iron sheet, insulation, and external galvanized iron sheet. The glass cover is 6  
194 mm thick; each glass plate of the glass cover is 60 cm wide, a height of 25 cm, and a slope  
195 angle of 30°. The 1.25 mm-thick internal galvanized iron sheets combined forming a closed  
196 box with a base area (absorber area) of 0.36 m<sup>2</sup>, and a height of 30 cm. Furthermore, the  
197 0.9 mm-thick external galvanized iron sheets combined forming the external surface with  
198 a base area of 0.49 m<sup>2</sup>, and a height of 30 cm. Moreover, there is a 5 cm Polystyrene  
199 insulation between them. Moreover, five fins with height, length and thickness 20, 600 and  
200 2.5 mm, respectively, were used to decrease the preheating time required for evaporating  
201 the still's basin water as shown in figure 2. Experiments were carried out from 8 am to 6  
202 pm. The freshwater production by the PSS is collected at the inner surface of the condenser  
203 by attaching a small metal piece obstruction. The condensed water is collected every hour  
204 by using a flexible hose pipe and the water is transferred into the measuring jar. The  
205 thermocouples were used to measure basin, water and glass temperatures. Skytron  
206 temperature sensor that was used to measure the ambient temperature, silver color with  
207 rang 100°C and ±0.5°C accuracy. Skytron radiation sensor with rang 2000 W/m<sup>2</sup> and  
208 ±1W/m<sup>2</sup> accuracy was used to measure solar radiation.

209

## 210 **3- Result and Discussion**

211 The experiment was conducted during the period of the end of August to the first of  
212 September 2018 at Jordan University of Science and Technology (J.U.S.T). Irbid (Latitude  
213 32.48, Longitude 35.98), Pyramid solar still was assembled and tested. Three parts of the  
214 experiments were carried out; the first part was performed by changing the water depth for  
215 basin water, the second part was performed by study the effect of increasing inlet water  
216 temperature on the performance of pyramid solar still. And the third part was performed  
217 by study the effect of fins on the performance of pyramid solar still.

218



219

### 220 **3.1 Changing Water Depth**

221 It has been experimentally investigated the effect of changing water depth on the solar still  
222 performance.

#### 223 **3.1.1 Solar radiation, water and ambient temperatures, and freshwater productivity**

224 Figures 3 and 4 show the variation of solar radiation and of the sunshine days during the  
225 experimental period. It can be seen that the change in solar radiation was insignificant  
226 through the experimental days. In addition, we noticed that the solar radiation increases  
227 with time to reach a maximum value between 1:00-2:00 PM. Also, we notice the same  
228 trend for ambient temperature which increase with time to reaches a maximum value  
229 between 3:00-4:00 PM.

230

231 Figures 5 (a), (b), (c), (d), and (e) show the basin water temperature, outer glass cover  
232 temperature, ambient temperature, and daily freshwater productivity for pyramid solar still  
233 with different water depths during experimental days. The figures show that the pyramid  
234 solar still with the lower basin depth gives a higher daily freshwater productivity and  
235 operates at higher basin temperatures during sunshine hours (from 8 am to 2 pm) as shown  
236 also in figure 6.

237 Figure 6 shows the variation of the basin water temperature of the pyramid solar still with  
238 different water depths from 1cm to 5 cm, the maximum basin water temperature was  
239 72.3°C; it was observed in the basin with 1cm water depth at 1:00 PM. On the other hand,  
240 the maximum basin water temperature with 5cm water was 57.1°C at 2:00 PM. It is clearly  
241 observed that, the basin water temperature increases significantly with a decrease in the  
242 depth of basin water during period from 8 am to 2 pm while its decrease with an increase  
243 water depth after 2 pm. This is due to that as the basin water depth is increased, the amount  
244 of water is also increased, So that the water needs more time and more energy to increase  
245 it temperature (increase slowly) and it remain hot for long period after 3 pm (decrease  
246 slowly) due to amount of heat absorbed is increased over the daylight.

247

248

249

#### 250 **3.1.2 Accumulated Amount of Fresh Water Production**

251 The variation of the hourly freshwater productivity of the pyramid solar still with different  
252 water depths from 1cm to 5cm by 1cm step are presented in figure 7. It was noticed that  
253 the maximum production of freshwater was 222 ml at a 1cm water depth at 1:00 PM while



254 the maximum production of freshwater was 128 ml at a 5 cm depth at 3:00 PM. We notice  
255 that the pyramid solar still productivity decrease with increasing water depth, also we  
256 notice that the still productivity during sunset hour for higher depth more than lower depth  
257 due to the heat stored during the sunshine hours in the higher water depth.

258 Figure 8 shows the total amount of freshwater of the pyramid solar still with different water  
259 depths. We noticed that the maximum production of freshwater was 1230.5 ml at 1cm  
260 water depth, then 1045 ml for 2 cm to reach 731 ml for 5 cm water depth.

261 The previous figure illustrated that the total amount of freshwater production of the  
262 pyramid solar still is increased when the water layer depth in the basin is decreased.

263

### 264 **3.2 Effect of Changing Inlet Water Temperature**

265 Figure 9 shows the effect of changing inlet water temperature from 30 C° to 50 C°  
266 on solar still productivity. it is clearly shown that the productivity of still increases as inlet  
267 water temperature increases up to 14:00 pm, after that the productivity begins to be equal.  
268 The reason behind that can be explain in term of water heat capacity. As increase inlet  
269 water temperature, water heat capacity increase, hence the productivity of still increase.  
270 But after 14:00 pm, Water temperature becomes equal for different inlet water temperature.  
271 Therefore, the productivity remains close from each other.

### 272 **3.3 Effect of Fins**

273

274 As fins were used at the bottom of the still, absorber plate can absorb more solar  
275 radiation due to the increase in exposure area and preheating time for the basin water  
276 decreased. Thus, productivity increased. It was found that productivity increased by 7.5%  
277 when fins were used at the bottom of the pyramid solar still. As shown in Figure 10.

278

279

280

281

282



283

## Conclusion

284 The pyramid solar still was designed and constructed to produce distilled water by  
285 changing water depth inside pyramid solar still and varying inlet water temperature under  
286 the weather conditions of Jordan. In addition, the present study was designed to determine  
287 the effect of fins on the amount of distilled water. The results of this study show that:

- 288 • increasing the water depth causes to decreases the productivity of the pyramid solar  
289 still.
- 290 • The daily productivity of the pyramid solar still was measured at five different  
291 depths, and the results show that:
  - 292 1- The maximum productivity of the pyramid solar still was at 1cm depth, and its  
293 value was 1230.5 ml.
  - 294 2- The minimum productivity of the pyramid solar still was at 5cm depth, and its value  
295 was 431 ml.
- 296 • The results showed that the still productivity could be influenced by depth variation  
297 to 40.6% of water depth ranging from 1 to 5 cm.
- 298 • From the experimental study, it is found that the varying inlet water temperature  
299 increases the productivity by 15.3% and 21.2% when varying the inlet water  
300 temperature from 30 C° to 40 C° and 50 C°, respectively.
- 301 • Experimental results showed that the average daily production was higher when  
302 fins were used in pyramid still by 7.5%.

303

## 304 Conflict of Interest

305 The authors declare that they have no conflict of interest.

306

307

308

309



## 310 **References**

- 311 Abdallah, S., Abu-Khader, M. M., & Badran, O. (2009). Effect of various absorbing  
312 materials on the thermal performance of solar stills. *Desalination*, 242(1-3), 128–  
313 137. [doi:10.1016/j.desal.2008.03.036](https://doi.org/10.1016/j.desal.2008.03.036)
- 314 Agrawal, A., Rana, R. S., & Srivastava, P. K. (2017). Heat transfer coefficients and  
315 productivity of a single slope single basin solar still in Indian climatic condition:  
316 Experimental and theoretical comparison. *Resource-Efficient Technologies*, 3(4), 466–  
317 482. [doi:10.1016/j.reffit.2017.05.003](https://doi.org/10.1016/j.reffit.2017.05.003)
- 318 Al-Garni, Ahmed Z. "Enhancing the solar still using immersion type water heater  
319 productivity and the effect of external cooling fan in winter." *Applied Solar Energy* 48.3  
320 (2012): 193-200. <https://doi.org/10.3103/S0003701X12030048>
- 321
- 322 Aybar, Hikmet S. "A review of desalination by solar still." *Solar desalination for the 21st*  
323 *century*. Springer, Dordrecht, 2007. 207-214. [https://doi.org/10.1007/978-1-4020-5508-](https://doi.org/10.1007/978-1-4020-5508-9_15)  
324 [9\\_15](https://doi.org/10.1007/978-1-4020-5508-9_15)
- 325 Badran, Ali A., et al. "A solar still augmented with a flat-plate collector." *Desalination*  
326 172.3 (2005): 227-234. <https://doi.org/10.1016/j.desal.2004.06.203>
- 327 Badran, O. O., and H. A. Al-Tahaineh. "The effect of coupling a flat-plate collector on the  
328 solar still productivity." *Desalination* 183.1-3 (2005): 137-142.  
329 <https://doi.org/10.1016/j.desal.2005.02.046>
- 330 Jani, H. K., & Modi, K. V. (2019). Experimental performance evaluation of single basin  
331 dual slope solar still with circular and square cross-sectional hollow fins. *Solar Energy*,  
332 179, 186–194. [doi:10.1016/j.solener.2018.12.054](https://doi.org/10.1016/j.solener.2018.12.054)
- 333 Kabeel, A. E., Sharshir, S. W., Abdelaziz, G. B., Halim, M. A., & Swidan, A.  
334 (2019). Improving performance of tubular solar still by controlling the water depth and  
335 cover cooling. *Journal of Cleaner Production*. [doi:10.1016/j.jclepro.2019.06.104](https://doi.org/10.1016/j.jclepro.2019.06.104)
- 336 Kabeel, A. E., Y. A. F. El-Samadony, and Wael M. El-Maghlany. "Comparative study on  
337 the solar still performance utilizing different PCM." *Desalination* 432 (2018): 89-96.  
338 <https://doi.org/10.1016/j.desal.2018.01.016>
- 339 Muthu Manokar, A., Taamneh, Y., Kabeel, A. E., Prince Winston, D., Vijayabalan, P.,  
340 Balaji, D., ... Mageshbabu, D. (2019). Effect of water depth and insulation on the  
341 productivity of an acrylic pyramid solar still – An experimental study. *Groundwater for*  
342 *Sustainable Development*, 100319. [doi:10.1016/j.gsd.2019.100319](https://doi.org/10.1016/j.gsd.2019.100319)
- 343 Phadatare, M. K., & Verma, S. K. (2007). Influence of water depth on internal heat and  
344 mass transfer in a plastic solar still. *Desalination*, 217(1-3), 267  
345 275. [doi:10.1016/j.desal.2007.03.006](https://doi.org/10.1016/j.desal.2007.03.006)



346 Rajamanickam, M. R., & Ragupathy, A. (2012). Influence of Water Depth on Internal Heat  
347 and Mass Transfer in a Double Slope Solar Still. Energy Procedia, 14, 1701–  
348 1708. [doi:10.1016/j.egypro.2011.12.1155](https://doi.org/10.1016/j.egypro.2011.12.1155)

349 Rubio-Cerda, Eduardo, Miguel A. Porta-Gándara, and Jose L. Fernandez-Zayas. "Thermal  
350 performance of the condensing covers in a triangular solar still." Renewable Energy 27.2  
351 (2002): 301-308. [https://doi.org/10.1016/S0960-1481\(01\)00196-3](https://doi.org/10.1016/S0960-1481(01)00196-3)

352 Voropoulos, K., E. Mathioulakis, and V. Belessiotis. "Experimental investigation of the  
353 behavior of a solar still coupled with hot water storage tank." Desalination 156.1-3 (2003):  
354 315-322. [https://doi.org/10.1016/S0011-9164\(03\)00362-X](https://doi.org/10.1016/S0011-9164(03)00362-X)

355 Voropoulos, K., E. Mathioulakis, and V. Belessiotis. "Experimental investigation of a solar  
356 still coupled with solar collectors." Desalination 138.1-3 (2001): 103-110.  
357 [https://doi.org/10.1016/S0011-9164\(01\)00251-X](https://doi.org/10.1016/S0011-9164(01)00251-X)

358 Velmurugan, V., et al. "Desalination of effluent using fin type solar still." Energy 33.11  
359 (2008): 1719-1727. <https://doi.org/10.1016/j.energy.2008.07.001>

360 Velmurugan, V., et al. "Single basin solar still with fin for enhancing productivity." Energy  
361 Conversion and Management 49.10 (2008): 2602-2608.  
362 <https://doi.org/10.1016/j.enconman.2008.05.010>

363

364

365

366

367

368

369

370

371

372

373

374

375

376

377



378 **List of figures**

379 **Figure 1.** Pyramid solar still that used in the experiment.

380 **Figure 2.** (a) A schematic diagram for pyramid solar still with fins in the basin (b) A  
381 detailed dimension of the fins.

382 **Figure 3.** Variation of solar radiation during experimental days.

383 **Figure 4.** Variation of ambient temperature during experimental days.

384 **Figure 5.** Variation of basin water temperature, outer glass cover temperature, ambient  
385 temperature, and daily freshwater productivity during experimental days

386 **Figure 6.** Variation of basin water temperature during experimental days for different  
387 water depths

388 **Figure 7.** Variation of hourly freshwater productivity for pyramid solar still with  
389 different water depths

390 **Figure 8.** Total amount of fresh water for pyramid solar still with different water depth

391 **Figure 19.** The effect of changing inlet water temperature from 30 C° to 50 C° on solar  
392 still productivity.

393 **Figure 10.** Effect of fins on productivity in the pyramid solar still.

394

395

396

397

398

399

400

401

402

403


404

405


406



407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429

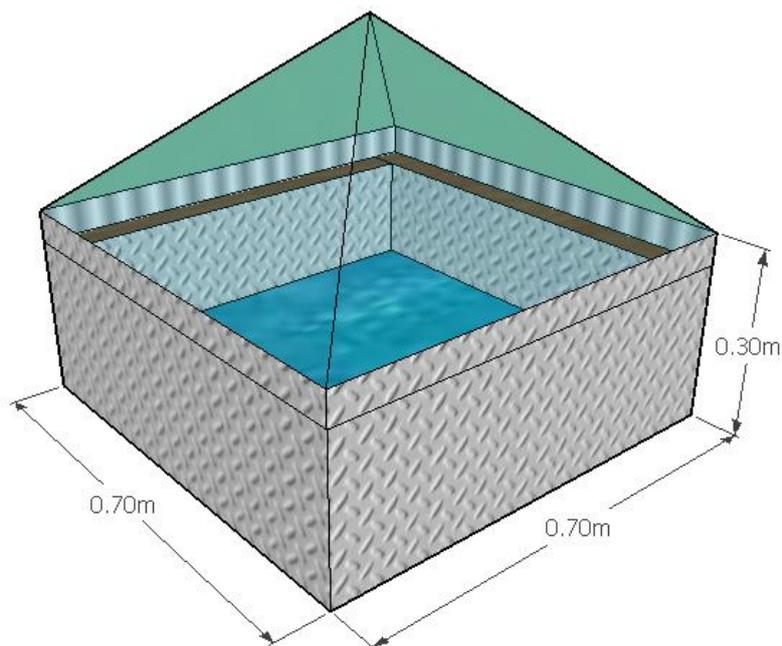


**Figure 1:** Pyramid solar still that used in the experiment

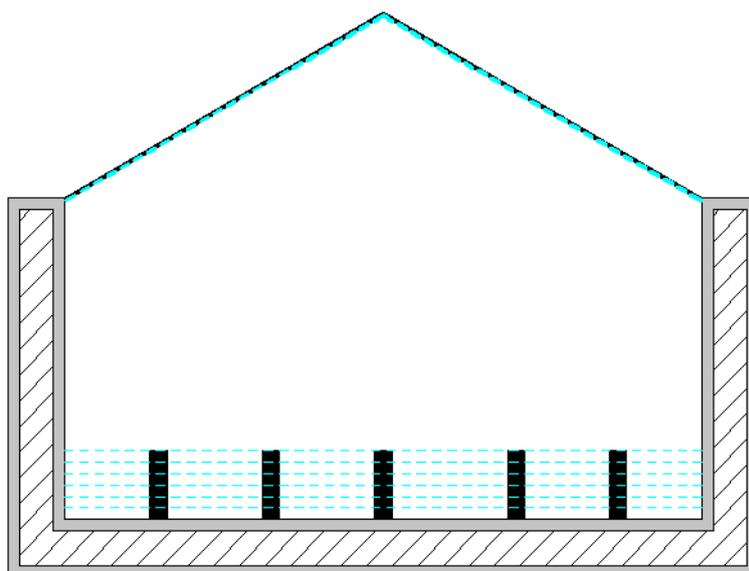

430  
431

(a)

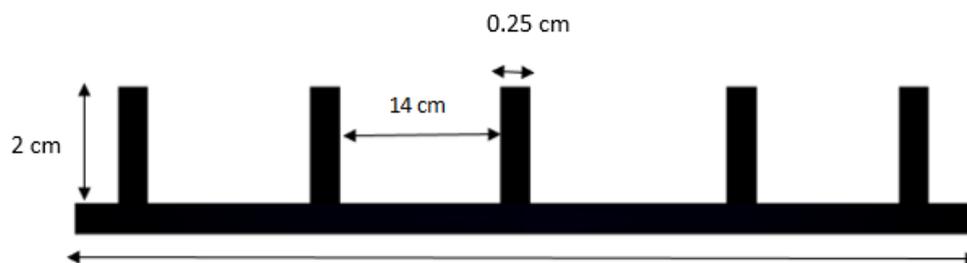

432  
433

(b)

434 **Figure 2:** (a) A schematic diagram for pyramid solar still with fins in the basin (b) A  
435 detailed dimension of the fins.

436


437

438

439


440

441

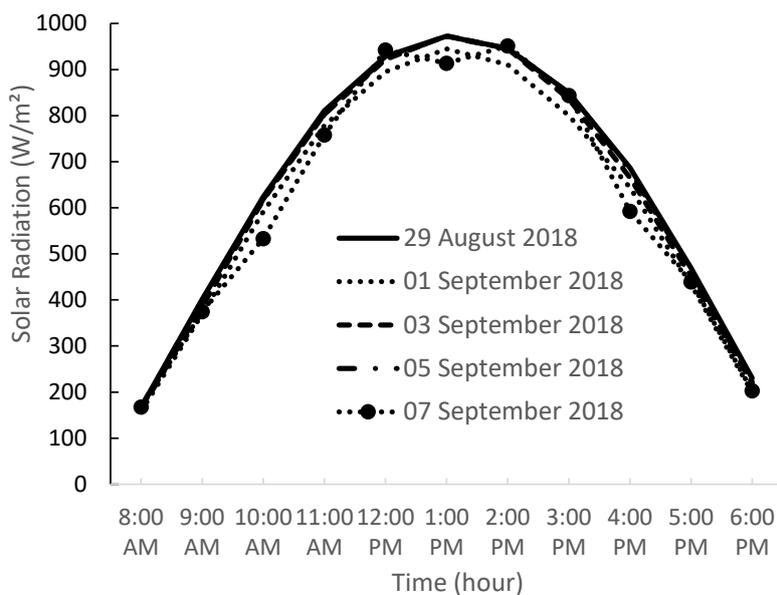


442

443 **Figure 3:** Variation of solar radiation during experimental days.

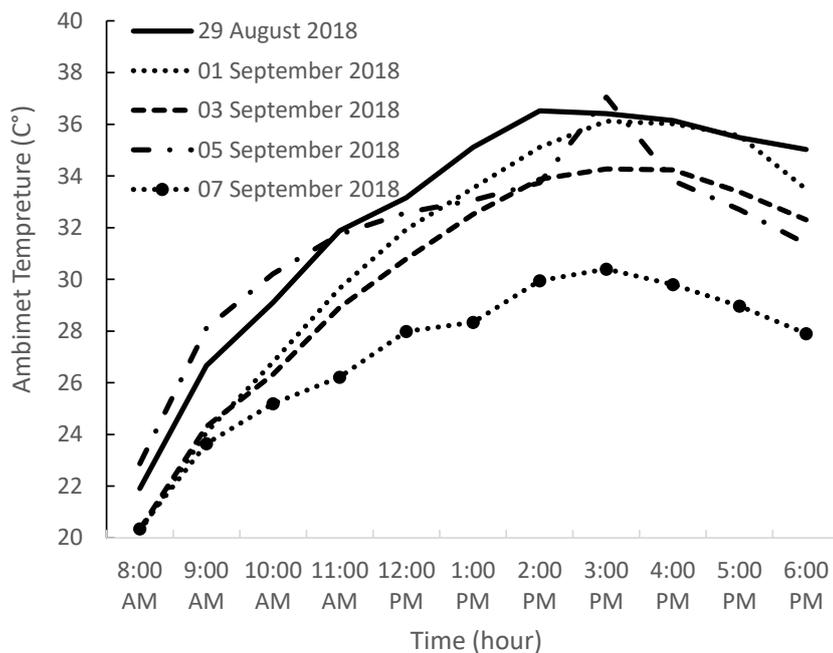

444

445 **Figure 4:** Variation of ambient temperature during experimental days.

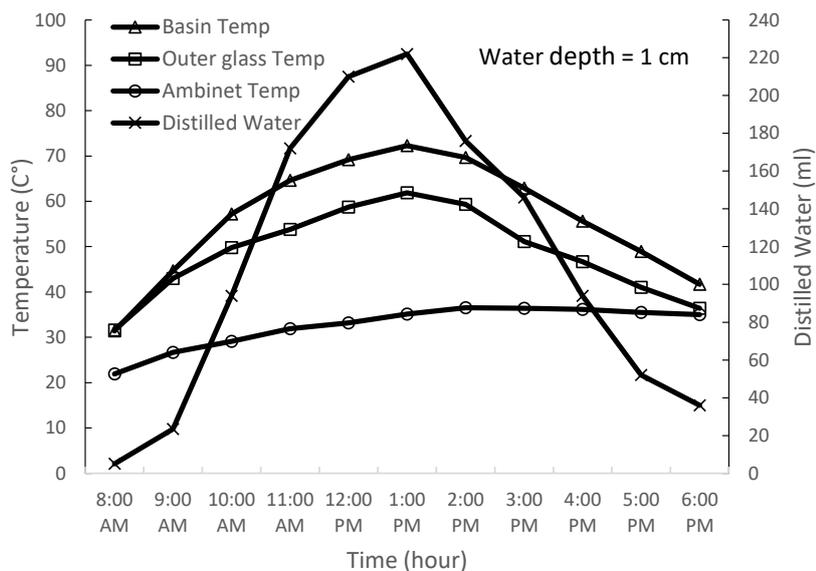


446

447

448


(a)

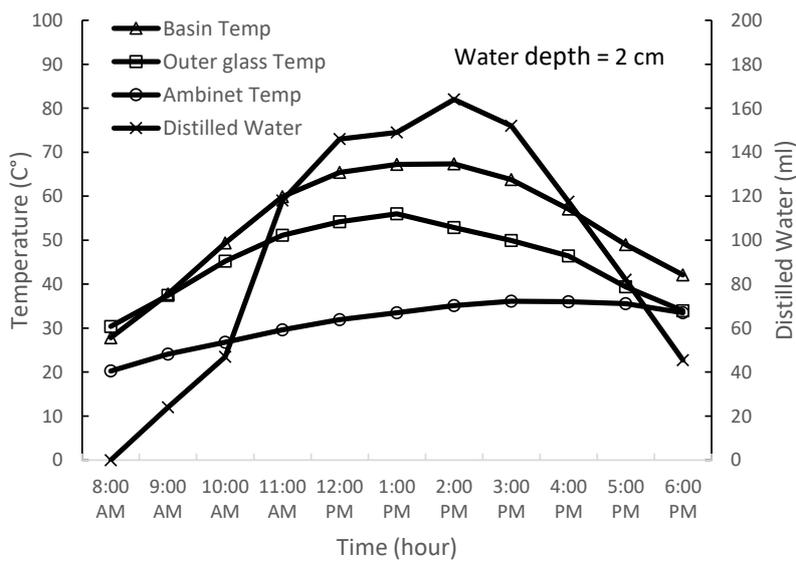

449

450


(b)

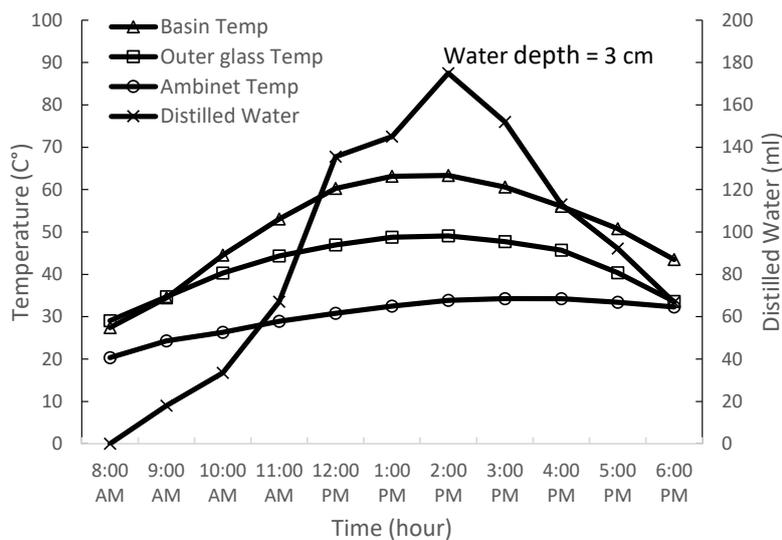

451

452


(c)

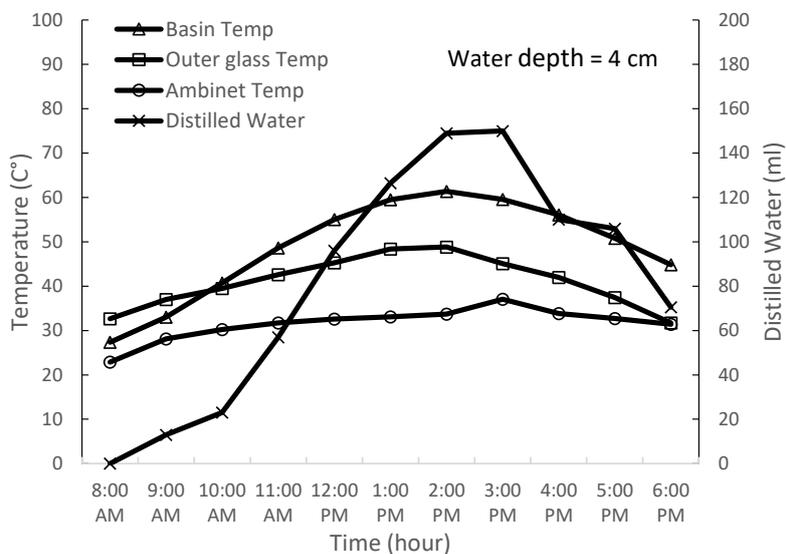

453

454

(d)

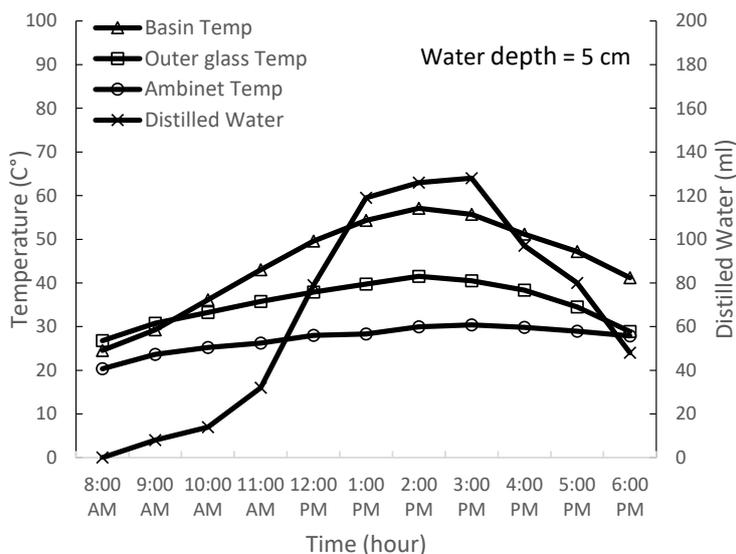


455

456


(e)

457 **Figure 5:** Variation of basin water temperature, outer glass cover temperature, ambient  
 458 temperature, and daily freshwater productivity during experimental days

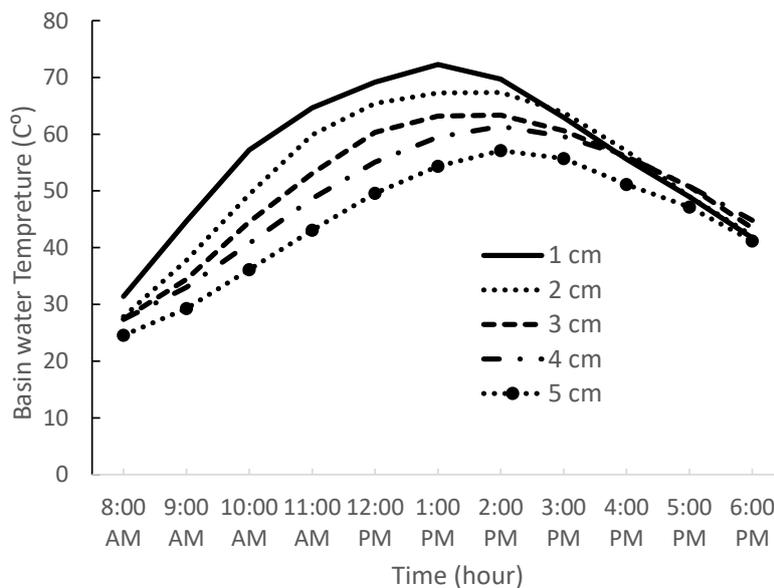


459

460 **Figure 6:** Variation of basin water temperature during experimental days for different  
 461 water depths.

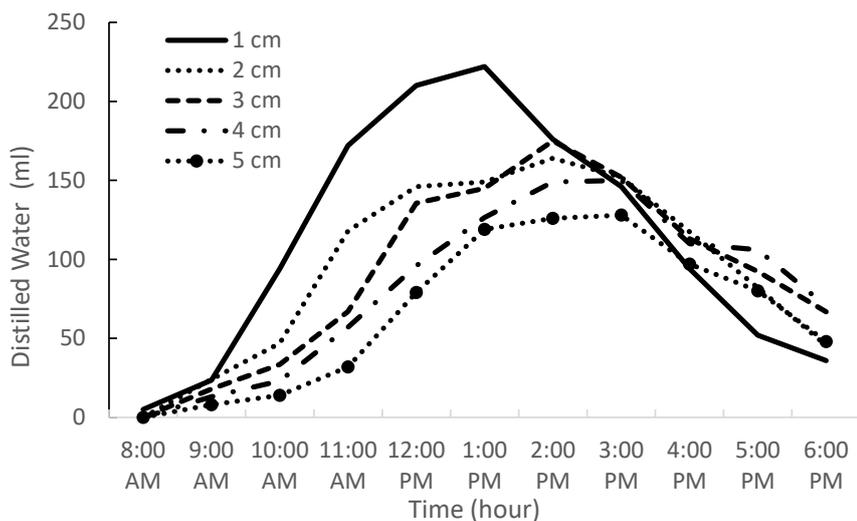

462

463 **Figure 7:** Variation of hourly freshwater productivity for pyramid solar still with  
 464 different water depths

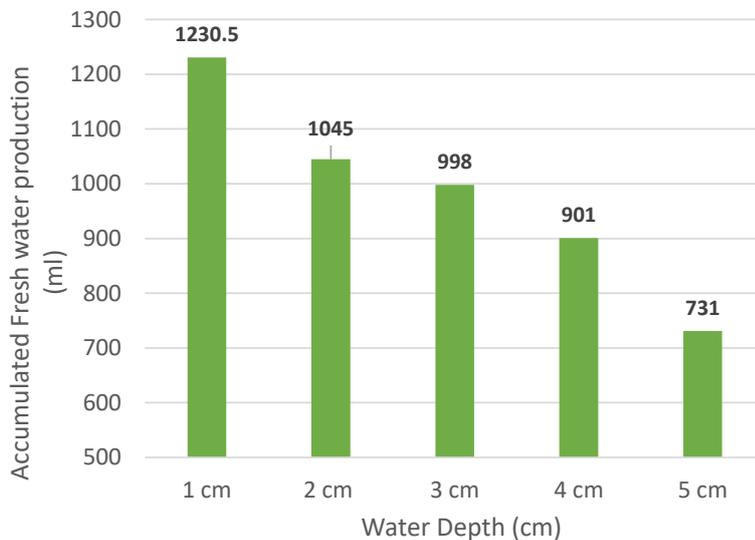


465

466 **Figure 8:** Total amount of fresh water for pyramid solar still with different water depth

467


468

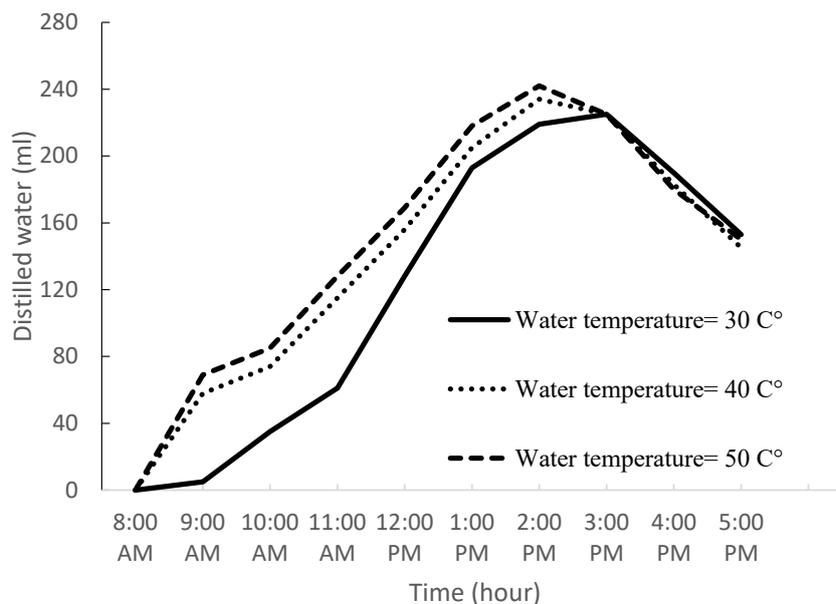

469

470

471 **Figure 9:** The effect of changing inlet water temperature from 30 C° to 50 C° on solar  
472 still productivity.

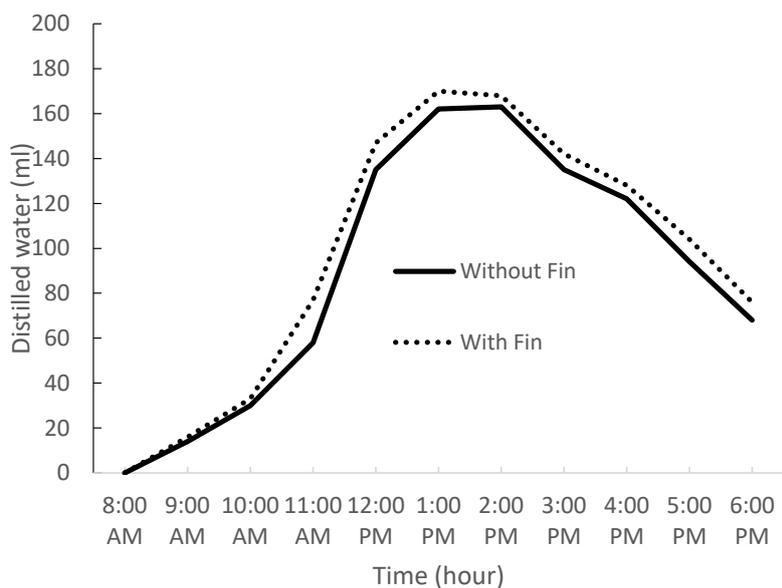

473

474 **Figure 10:** Effect of fins on productivity in the pyramid solar still.  
475